

TALENT X USER GUIDE



Published by:
G2G Lighting
1819 Underwood Blvd, Unit 2
Delran NJ, 08075

Questions to: customerservice@g2glighting.com

Read the User Manual carefully. Subject to modification without prior notice.
Check our website for updates to this manual: www.g2glighting.com
Modification of the product is prohibited.
This manual is designed for all users of Talent I controller.

*IC CHIP

Part #	Item	Signal	IC Chip
QISM1001	G2G Trico 2 DMX	DMX	SM18511
QISM5005	G2G Trico L RGBW	DMX	SM18511
QISM5008	G2G Mini RGB	DMX	SM18511
QISM6002	D50 RGB	DMX	UCS512
QISM6005	D50 White 2700K	DMX	UCS512
QISM6006	D50 White 5000K	DMX	UCS512
QISM8006	D30 DMX RGB	DMX	SM18511
QISE3001	G2G Edge RGB 4FT	DMX	SM18511
QISE3002	G2G Edge RGB 8FT	DMX	SM18511
Wall Washer Series		DMX	UCS512C

Table of Contents

I. Introduction

1.1 Specifications.....02
 1.2 Control Panel02
 1.3 Working Mode03

2. Web Interface Instruction

2.1 Log in03
 2.2 Interface Instruction.....04
 2.2.1 node management.....04
 2.2.2 Program Management.....04
 2.2.3 Task Management.....05
 2.2.4 File Management.....07
 2.2.5 Alarm List.....07
 2.2.6 Operation log.....07

3. APP Instruction.....08


*IC CHIP.....09

I. Introduction

1.1 Specifications


Dimension	L286mm(11.26")xW163mm(6.4")xH46mm(1.8")
Input Voltage	110~240Vac, 50/60Hz
Rated Power	≤24W
Working Temp.	-40℃~70℃
Relative humidity	≤95%
IP Rated	IP20
Packing	Controller*1, AC Plug*1

1.2 Control Panel

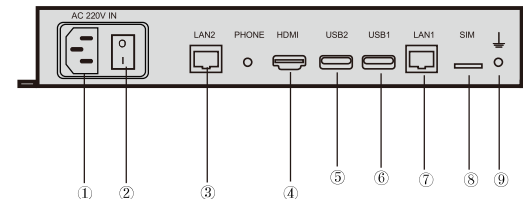

- ① AC Input
- ② Power Switch
- ③ Internet connection port
- ④ HDMI video output port
- ⑤ USB2
- ⑥ USB1
- ⑦ Secondary controller connect port
- ⑧ SIM card slot


1.3 Working Mode

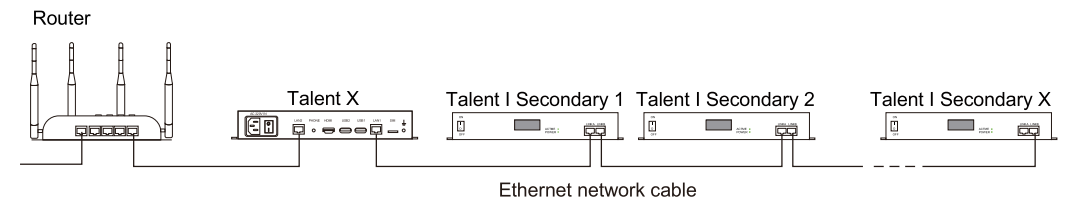

2. Web Interface Instruction

2.1 Log in


i. Go to log in page via <https://www.g2g-cloud2.com:8082/weakCurrent/#/login>

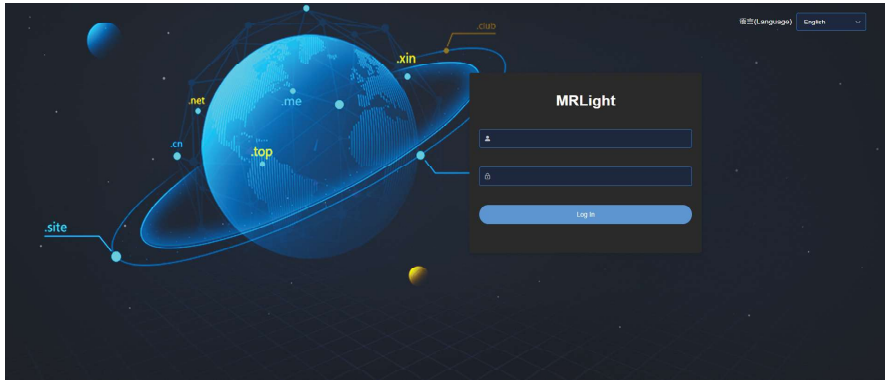

ii. Choose your language on the right top corner:



iii. Input the user name and password provided by G2G and then click "Log in"

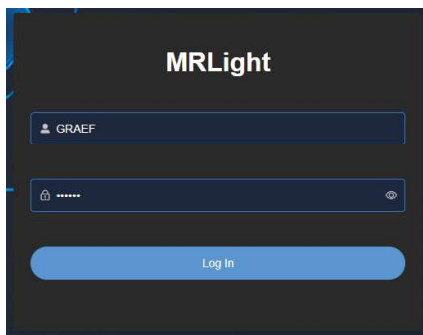


*If you have preferred user name and passwords, please tell G2G's sales rep.

2.2 Interface Instruction


2.2.1 node management




Click **node information**, and you can see node status.


Network Level Network Level indicates the status of controller. **offline** indicates controller is offline.  indicates controller is online.

Sub Center of Information  Indicates how many secondary controller is online.


Current Program Name  Indicates the current playing program.


Current Program Name  Indicates no program is played.

2.2.2 Program Management



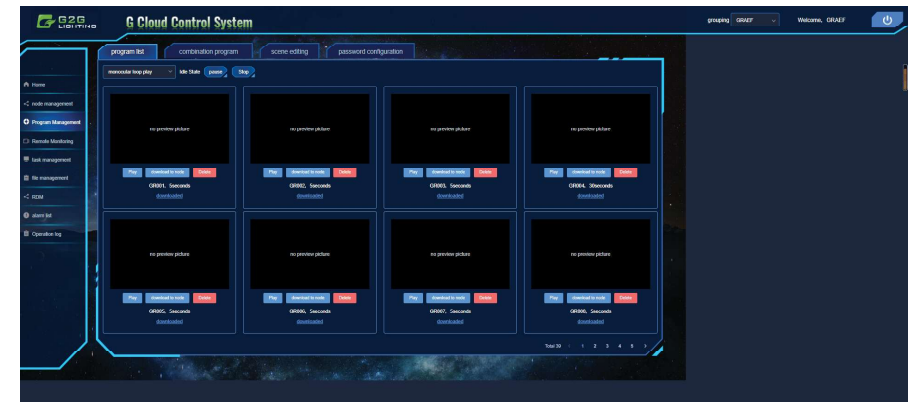


 Click "Play" to select program
 Click "Delete" to delete program




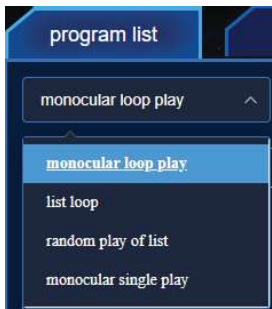


monocular loop play: loop play specific program
 list loop: loop play listed program
 random play of list: randomly play listed program
 monocular single play: play specific program once

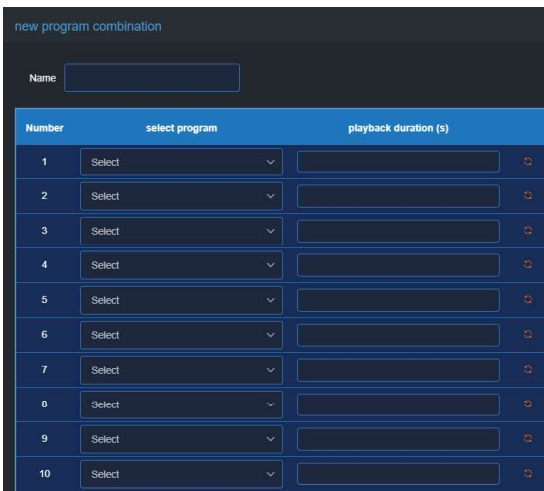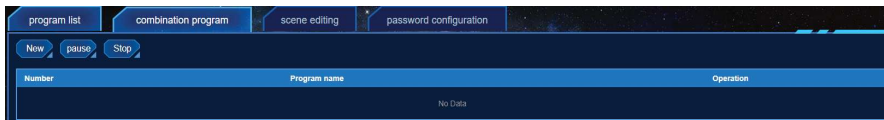


2.2.3 Task Management

Click **Modify** to schedule program.

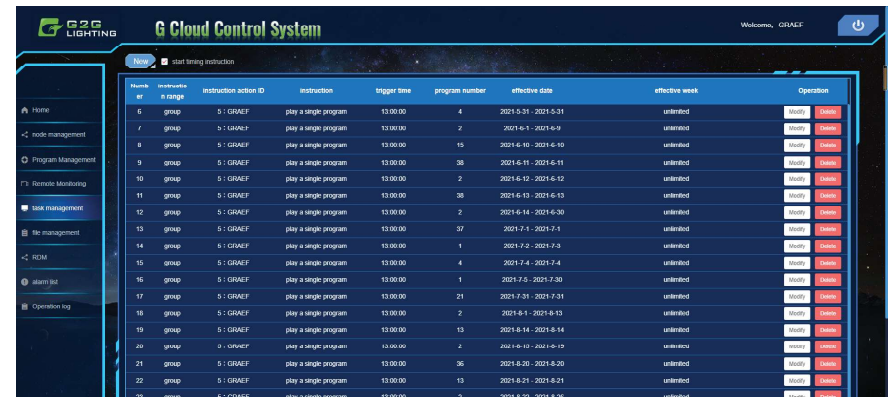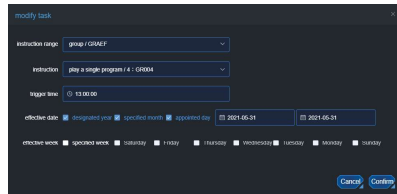


Click instruction to command program. Please select default setting: play a single program.

*shut down command will shut down the controller. Don't select this option if no necessary.

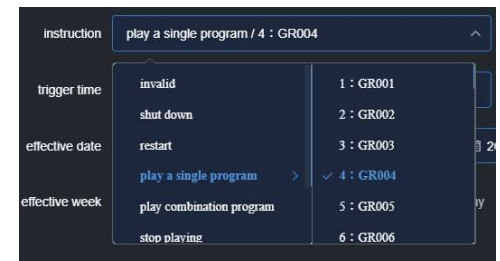

Set trigger time or date for selected program.

G2G's cloud locates in China with Beijing Time Zone. Please convert local time to Beijing time when you schedule the time or date for program.

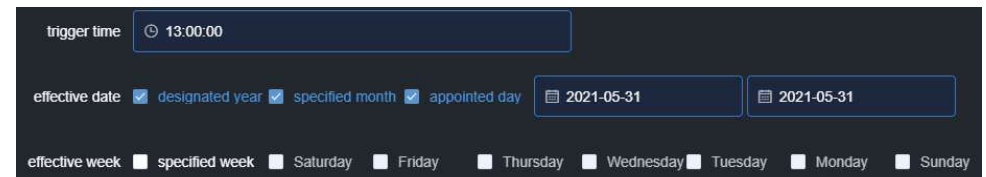

After setting, you can click **Confirm** to save your setting.

If you need to add more scheduled program, please ask G2G's sale rep for help. G2G will give you permissions.



Once you schedule the program, it will start play once hit the trigger time until next program is triggered.

2.2.4 File Management

This interface is used to upload new program. If you need new program made, please tell your sales rep and G2G will preset for you.

file number	file name	modification time	file size	upload time	upload user	operations
1	GR4EF1	2021-08-10 18:00	488.002	2021-08-10 18:15	admin	upload, delete, rename
2	GR4EF1	2021-08-10 18:00	488.002	2021-08-10 18:15	admin	upload, delete, rename
3	GR4EF1	2021-08-10 18:00	488.002	2021-08-10 18:15	admin	upload, delete, rename
4	GR4EF1	2021-08-10 18:00	488.002	2021-08-10 18:15	admin	upload, delete, rename
5	GR4EF1	2021-08-10 18:00	488.002	2021-08-10 18:15	admin	upload, delete, rename
6	GR4EF1	2021-08-10 18:00	488.002	2021-08-10 18:15	admin	upload, delete, rename
7	GR4EF1	2021-08-10 18:00	488.002	2021-08-10 18:15	admin	upload, delete, rename
8	GR4EF1	2021-08-10 18:00	488.002	2021-08-10 18:15	admin	upload, delete, rename
9	GR4EF1	2021-08-10 18:00	488.002	2021-08-10 18:15	admin	upload, delete, rename
10	GR4EF1	2021-08-10 18:00	488.002	2021-08-10 18:15	admin	upload, delete, rename
11	GR4EF1	2021-08-10 18:00	488.002	2021-08-10 18:15	admin	upload, delete, rename
12	GR4EF1	2021-08-10 18:00	488.002	2021-08-10 18:15	admin	upload, delete, rename
13	GR4EF1	2021-08-10 18:00	488.002	2021-08-10 18:15	admin	upload, delete, rename
14	GR4EF1	2021-08-10 18:00	488.002	2021-08-10 18:15	admin	upload, delete, rename
15	GR4EF1	2021-08-10 18:00	488.002	2021-08-10 18:15	admin	upload, delete, rename
16	GR4EF1	2021-08-10 18:00	488.002	2021-08-10 18:15	admin	upload, delete, rename
17	GR4EF1	2021-08-10 18:00	488.002	2021-08-10 18:15	admin	upload, delete, rename
18	GR4EF1	2021-08-10 18:00	488.002	2021-08-10 18:15	admin	upload, delete, rename
19	GR4EF1	2021-08-10 18:00	488.002	2021-08-10 18:15	admin	upload, delete, rename
20	GR4EF1	2021-08-10 18:00	488.002	2021-08-10 18:15	admin	upload, delete, rename
21	GR4EF1	2021-08-10 18:00	488.002	2021-08-10 18:15	admin	upload, delete, rename
22	GR4EF1	2021-08-10 18:00	488.002	2021-08-10 18:15	admin	upload, delete, rename
23	GR4EF1	2021-08-10 18:00	488.002	2021-08-10 18:15	admin	upload, delete, rename
24	GR4EF1	2021-08-10 18:00	488.002	2021-08-10 18:15	admin	upload, delete, rename
25	GR4EF1	2021-08-10 18:00	488.002	2021-08-10 18:15	admin	upload, delete, rename
26	GR4EF1	2021-08-10 18:00	488.002	2021-08-10 18:15	admin	upload, delete, rename
27	GR4EF1	2021-08-10 18:00	488.002	2021-08-10 18:15	admin	upload, delete, rename
28	GR4EF1	2021-08-10 18:00	488.002	2021-08-10 18:15	admin	upload, delete, rename
29	GR4EF1	2021-08-10 18:00	488.002	2021-08-10 18:15	admin	upload, delete, rename
30	GR4EF1	2021-08-10 18:00	488.002	2021-08-10 18:15	admin	upload, delete, rename

2.2.5 Alarm List

This interface is used to check all the alarm information.

alarm number	Number	Name	Alarm Type	warning information	alarm time
361574	5	GR4EF1	sub control abnormal office	sub control abnormal office	2021-08-10 18:05:00
361575	5	GR4EF1	time service office alarm	time service office alarm	2021-08-10 18:05:00
361567	5	GR4EF1	sub control abnormal office	sub control abnormal office	2021-08-10 18:00:00
361568	5	GR4EF1	time service office alarm	time service office alarm	2021-08-10 18:00:00
361569	5	GR4EF1	sub control abnormal office	sub control abnormal office	2021-08-10 18:55:00
361561	5	GR4EF1	time service office alarm	time service office alarm	2021-08-10 18:55:00
361553	5	GR4EF1	sub control abnormal office	sub control abnormal office	2021-08-10 18:50:00
361554	5	GR4EF1	time service office alarm	time service office alarm	2021-08-10 18:50:00
361548	5	GR4EF1	sub control abnormal office	sub control abnormal office	2021-08-10 18:45:00
361547	5	GR4EF1	time service office alarm	time service office alarm	2021-08-10 18:45:00
361539	5	GR4EF1	sub control abnormal office	sub control abnormal office	2021-08-10 18:40:00
361540	5	GR4EF1	time service office alarm	time service office alarm	2021-08-10 18:40:00
361532	5	GR4EF1	sub control abnormal office	sub control abnormal office	2021-08-10 18:35:00
361533	5	GR4EF1	time service office alarm	time service office alarm	2021-08-10 18:35:00
361525	5	GR4EF1	sub control abnormal office	sub control abnormal office	2021-08-10 18:30:00
361526	5	GR4EF1	time service office alarm	time service office alarm	2021-08-10 18:30:00
361518	5	GR4EF1	sub control abnormal office	sub control abnormal office	2021-08-10 18:25:00
361519	5	GR4EF1	time service office alarm	time service office alarm	2021-08-10 18:25:00
361511	5	GR4EF1	sub control abnormal office	sub control abnormal office	2021-08-10 18:20:00
361512	5	GR4EF1	time service office alarm	time service office alarm	2021-08-10 18:20:00

2.2.6 Operation log

This interface is used to check all the alarm information.

Number	operator	Type	content	operation time
11395	GR4EF1	Program Management	Group number 5, Play Mode 6, program led 0, execution/Program pause, operation failed	2021-08-10 18:43:38
11394	GR4EF1	Program Management	view details	2021-08-10 18:42:21
11393	GR4EF1	Program Management	view details	2021-08-10 18:23:54
11392	GR4EF1	Program Management	Number 1, execution/delete Combo, The operation was successful	2021-08-10 18:23:18
11391	GR4EF1	Program Management	view details	2021-08-10 18:21:49
11390	GR4EF1	Program Management	view details	2021-08-10 18:20:59
11389	GR4EF1	Program Management	view details	2021-08-10 18:20:56
11388	GR4EF1	Program Management	view details	2021-08-10 18:20:27
11387	GR4EF1	Program Management	view details	2021-08-10 18:19:04
11386	GR4EF1	Program Management	Number 1, execution/led group program, The operation was successful	2021-08-10 18:19:01
11385	GR4EF1	Program Management	view details	2021-08-10 18:18:35
11384	GR4EF1	Program Management	combination program name 001, execution/delete Combo, The operation was successful	2021-08-10 18:18:31
11383	GR4EF1	Program Management	view details	2021-08-10 18:11:44
11382	GR4EF1	Program Management	view details	2021-08-10 18:10:20
11381	GR4EF1	Program Management	view details	2021-08-10 18:10:06
11380	GR4EF1	Program Management	Group number 5, Play Mode 6, program led 0, execution/Program pause, operation failed	2021-08-10 18:10:04
11379	GR4EF1	scene operation	execution/scene modification password, operation failed	2021-08-10 18:09:22
11378	GR4EF1	scene operation	execution/scene modification password, operation failed	2021-08-10 18:09:06
11352	GR4EF1	task management	Group number 5, group name GR4EF1, execution/modify timing instruction, The operation was successful	2021-08-10 15:55:47
11350	GR4EF1	Program Management	view details	2021-08-10 15:48:09

3. APP Instruction

Go to <https://g2glighting.com/index/app.html> and download Android APP



Step 1. Log in

Step 2. Click Play List Icon

Step 3. Click the square icon to switch Program (Program# will become green once the program being selected)

**** Click Node List Icon to check which program the sign is playing**

**** Click this icon to change play mode**

**** Click this icon to stop playing program**

- Single Loop Mode
- Loop Playback Mode
- Shuffle Mode